

Wireless Temperature Sensor

Flexible sensor applications



RFM3200

APPLICATIONS

- Environmental monitoring
- Bulk material monitoring
- Data center monitoring
- Interior temperatures
- Equipment monitoring
- Point of shipment cold chain

KEY FEATURES

- Standard temperature range
-40 °C to +85 °C
- Powered by Magnus® S3
- Flexible sensor design
- Battery-free design
- Sensor size
127.5 x 31.9 mm
- Adhesive backing

Battery-free equipment monitoring

The RFM3200 is a wireless battery-free temperature sensor. This flexible sensor is designed to monitor environmental and material temperatures in a wide range of settings. Typical applications include environmental temperature monitoring, bulk material temperature monitoring, data center chiller and cooling monitoring, as well as cold chain monitoring at key shipment centers.

Wireless temperature sensing

The RFM3200 has a standard operating temperature range of -40 °C to +85 °C. This covers the nominal operating temperatures of most equipment and environmental operating conditions.

Flexible easy to install design

The RFM3200 is built using flexible materials with a built-in adhesive strip. The RFM3200 incorporates an integrated RF antenna to harvest energy for the temperature sensing function, as well as to communicate with a RAIN/UHF compliant reader. The integrated antenna is configured to be relatively insensitive to moisture and rain but is not suitable for direct use on metal.

Compliance




The RFM3200 is available in FCC and EU/ETSI frequency ranges. The RFM3200 requires a RAIN/UHF compliant reader. These sensors can be purchased separately or as part of a kit.



RFM3200 Performance Data

Flexible temperature sensor for monitoring applications

PARAMETER	VALUE
Normal temperature range	-40 °C to +85 °C
Compatible standards	EPC class 1 gen 2 v2.0.1 ISO 18000-6C
Integrated circuit	Powered by Magnus® S3
TID memory	64-bits
EPC memory	160-bits supporting up to 128-bit EPC
User memory	128-bits
Sensor die cut size	127.5 x 31.9 mm
Sensor pitch	38.1 mm
Web width	101.7 mm
Adhesive	Self-stick with easy release tab
Shipment method	Roll
Minimum order quantity	25 pc MOQ
Ordering information	RFM3200-AFR (FCC 902 to 928 MHz) RFM3200-AER (ETSI 865.6 MHz to 867.6MHz)

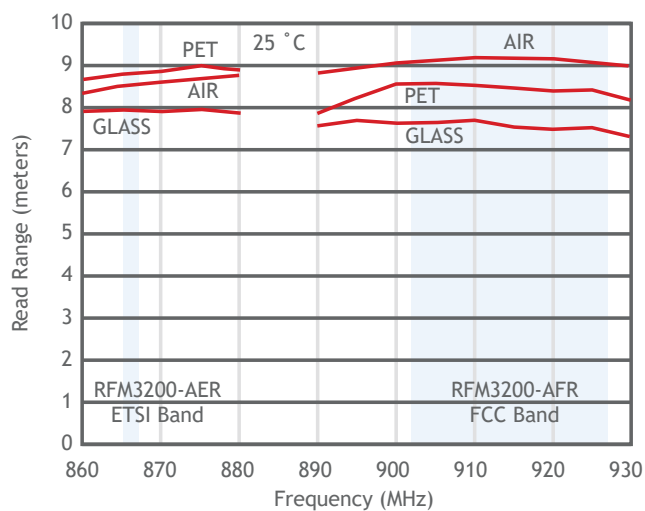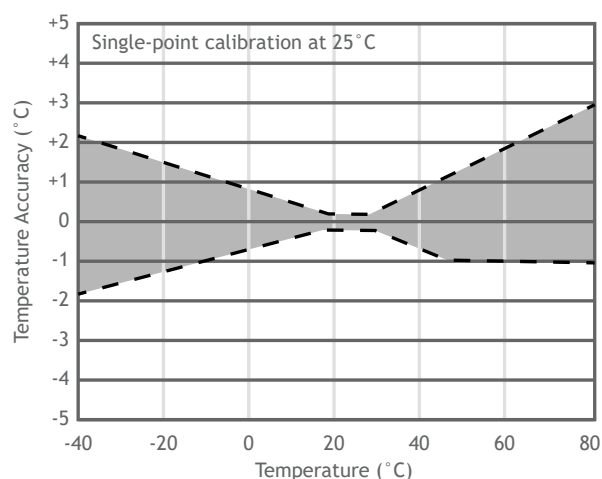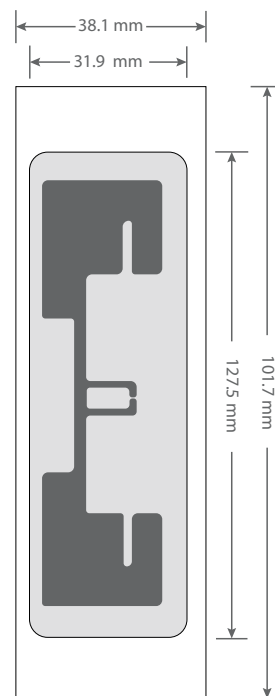



RFmicron.com 代理商联系方式:

样品, 评估板, 参考设计, 报价, 技术支持

电话: 0755-82565851

邮件: dwin100@dwintech.com

手机: 156-2521-4151

网址: <http://www.dwintech.com/rfmicron.html>

深圳市南频科技有限公司